

LOCH FORM

**Punched acoustic panels with
diameters 3-16mm**



www.trikustik.at




www.trikustik.at

WE MAKE WOOD SOUND GOOD

TRIKUSTIK is an innovative Austrian company specialising in the development and manufacturing of high-quality acoustic boards made of solid wood and wood-based materials.

Through this focus on products for room acoustic optimisation, we offer building owners, acoustic planners, architects and processors many years of expertise in the development of individual solutions and a high variance of standardised design options.

As a team, we deliberately break new ground and develop ourselves according to the principles of self-organisation.


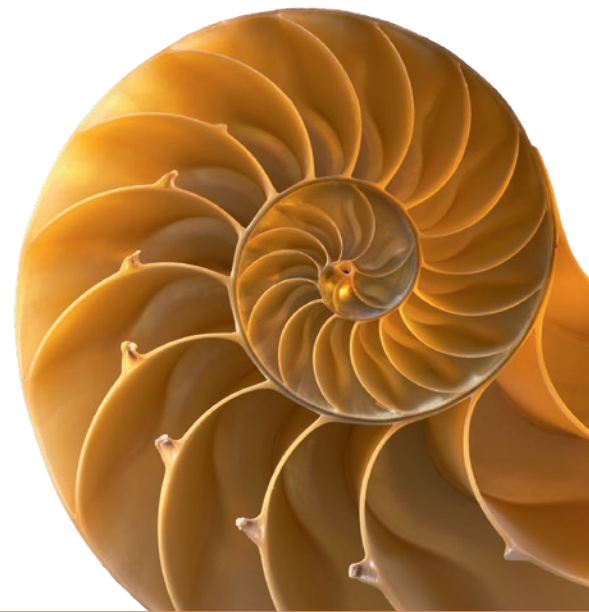


LOCH FORM

ACOUSTIC BOARDS


Acoustic panels with punched perforations are very versatile and can be manufactured with various hole diameters and grids. Due to the order-related production, hole-free edges as well as cut-outs can be made to customer requirements.

More reference photos on
www.trikustik.at

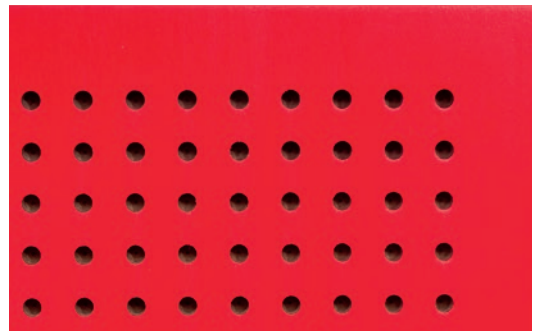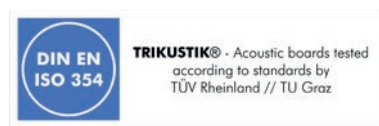

Datasheet Lochform R6,4D3

VS_2022_7

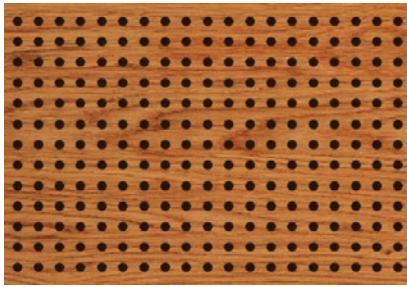

R = Grid in mm: 6,4mm
D = Diameter in mm: 3,0mm

Open surface: 17,26%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Panel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Panel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview
→ available formats and measures
→ available materials
→ available surfaces and colors
→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

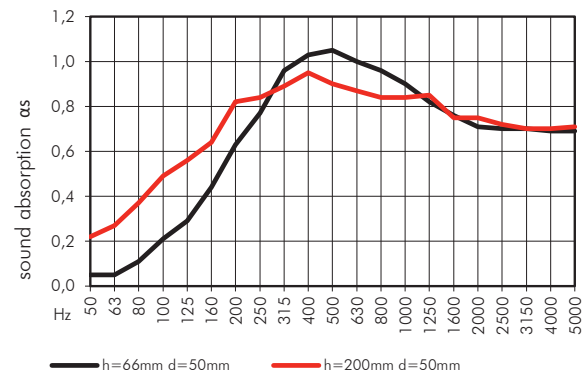

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs	0,05	0,05	0,11	0,21	0,29	0,44	0,63	0,77	0,96	1,03	1,05	1,00	0,96	0,90	0,82	0,76	0,71	0,70	0,70	0,69	0,69	αw: 0,80
	αp		0,05			0,30			0,80			1,05			0,90			0,70			0,70		SAA: 0,86
h=200mm d=50mm	αs	0,22	0,27	0,37	0,49	0,56	0,64	0,82	0,84	0,89	0,95	0,90	0,87	0,84	0,84	0,85	0,75	0,75	0,72	0,70	0,70	0,71	αw: 0,80 (L)
	αp		0,30			0,55			0,85			0,90			0,85			0,75			0,70		SAA: 0,84

Datasheet Lochform R8D3

VS_2022_7

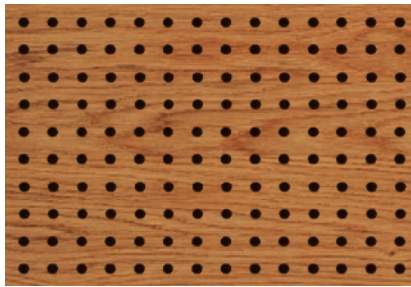

R = Grid in mm: 8,0mm
D = Diameter in mm: 3,0mm

Open surface: 11,04%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Paneel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

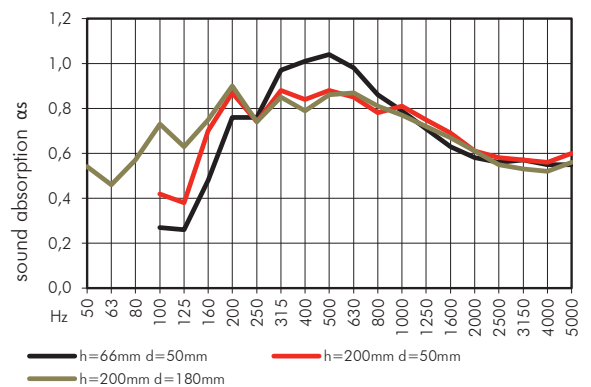

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs				0,27	0,26	0,48	0,76	0,76	0,97	1,01	1,04	0,98	0,86	0,79	0,71	0,63	0,58	0,56	0,57	0,55	0,55	αw: 0,65 (M)
	αp					0,35		0,85				1,00			0,80			0,60			0,55		SAA: 0,80
h=200mm d=50mm	αs				0,42	0,38	0,70	0,87	0,74	0,88	0,84	0,88	0,85	0,78	0,81	0,75	0,69	0,61	0,58	0,57	0,56	0,60	αw: 0,70 (L)
	αp					0,50		0,85				0,85			0,80			0,65			0,60		SAA: 0,77
h=200mm d=180mm	αs	0,54	0,46	0,57	0,73	0,63	0,75	0,90	0,74	0,85	0,79	0,86	0,87	0,81	0,77	0,72	0,67	0,61	0,55	0,53	0,52	0,56	αw: 0,65 (L)
	αp		0,50			0,70		0,85				0,85			0,75			0,60			0,55		SAA: 0,76

Datasheet Lochform R8D4

VS_2022_7

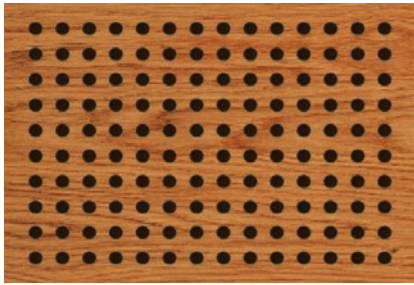

R = Grid in mm: 8,0mm
D = Diameter in mm: 4,0mm

Open surface: 19,63%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Panel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Panel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

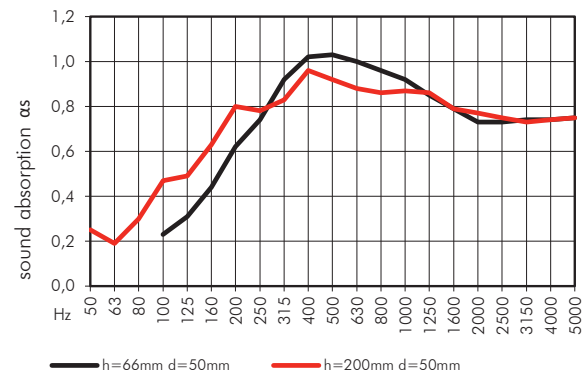

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs				0,23	0,31	0,44	0,62	0,74	0,92	1,02	1,03	1,00	0,96	0,92	0,85	0,79	0,73	0,73	0,74	0,74	0,75	αw: 0,85
	αp					0,35			0,75			1,00			0,90			0,75			0,75		SAA: 0,86
h=200mm d=50mm	αs	0,25	0,19	0,30	0,47	0,49	0,63	0,80	0,78	0,83	0,96	0,92	0,88	0,86	0,87	0,86	0,79	0,77	0,75	0,73	0,74	0,75	αw: 0,85
	αp		0,25			0,55			0,80			0,90			0,85			0,75			0,75		SAA: 0,84

Data sheet Lochform R16D5

VS_2025_1

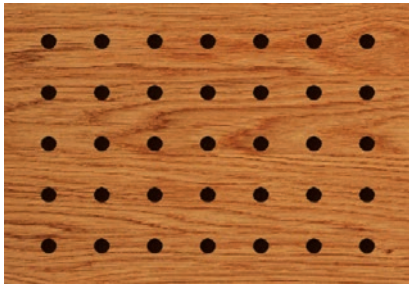

R = Grid in mm: 16,0mm
D = Diameter in mm: 5,0mm

Open surface: 7,67%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Paneel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by TU Graz

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

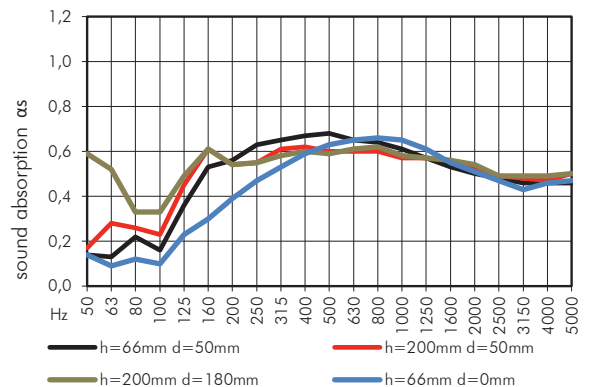

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=0mm	αs	0,14	0,09	0,12	0,10	0,23	0,30	0,39	0,47	0,53	0,59	0,63	0,65	0,66	0,65	0,61	0,55	0,51	0,47	0,43	0,46	0,47	αw: 0,55
	αp		0,10			0,20			0,45			0,60			0,65			0,50			0,45		SAA: 0,56
h=66mm d=50mm	αs	0,14	0,13	0,22	0,16	0,36	0,53	0,56	0,63	0,65	0,67	0,68	0,65	0,64	0,61	0,57	0,53	0,50	0,48	0,46	0,46	0,46	αw: 0,55(L)
	αp		0,15			0,35			0,60			0,65			0,60			0,50			0,45		SAA: 0,60
h=200mm d=50mm	αs	0,17	0,28	0,26	0,23	0,45	0,61	0,54	0,55	0,61	0,62	0,60	0,60	0,60	0,57	0,57	0,56	0,52	0,49	0,48	0,47	0,50	αw: 0,60
	αp		0,25			0,45			0,55			0,60			0,60			0,50			0,50		SAA: 0,57
h=200mm d=180mm	αs	0,59	0,52	0,33	0,33	0,49	0,61	0,54	0,55	0,58	0,60	0,59	0,61	0,62	0,58	0,57	0,56	0,54	0,49	0,49	0,49	0,50	αw: 0,60
	αp		0,50			0,50			0,55			0,60			0,60			0,55			0,50		SAA: 0,57

Datasheet Lochform R16D6

VS_2022_7

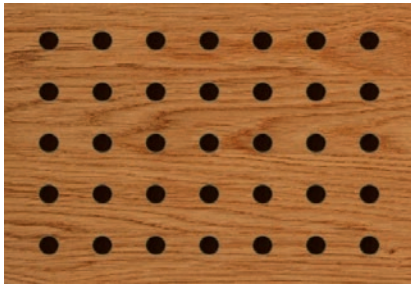

R = Grid in mm: 16,0mm
D = Diameter in mm: 6,0mm

Open surface: 11,04%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Paneel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

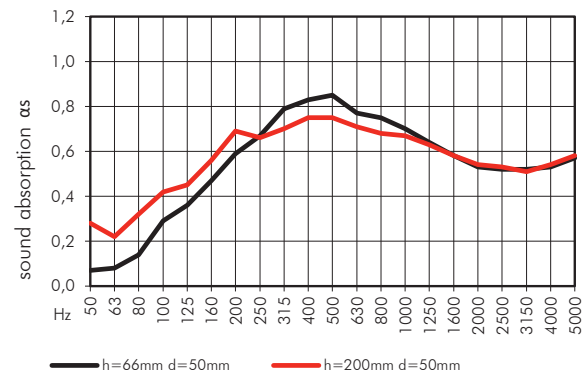

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs	0,07	0,08	0,14	0,29	0,36	0,47	0,59	0,67	0,79	0,83	0,85	0,77	0,75	0,70	0,64	0,58	0,53	0,52	0,52	0,53	0,57	αw: 0,65 (L)
	αp		0,10			0,35			0,70			0,80			0,70			0,55			0,55		SAA: 0,68
h=200mm d=50mm	αs	0,28	0,22	0,32	0,42	0,45	0,56	0,69	0,66	0,70	0,75	0,75	0,71	0,68	0,67	0,63	0,58	0,54	0,53	0,51	0,54	0,58	αw: 0,65 (L)
	αp		0,25			0,50			0,70			0,75			0,65			0,55			0,55		SAA: 0,66

Datasheet Lochform R16D8

VS_2022_7

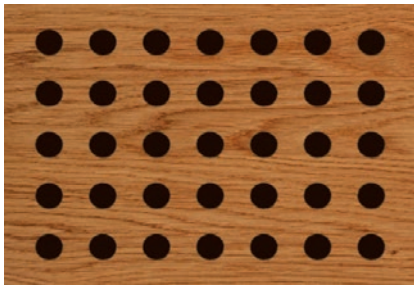

R = Grid in mm: 16,0mm
D = Diameter in mm: 8,0mm

Open surface: 19,63%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Panel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Panel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

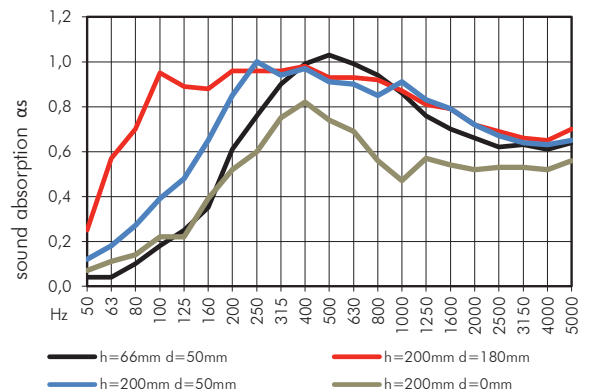

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs	0,04	0,04	0,10	0,18	0,25	0,35	0,61	0,76	0,90	0,99	1,03	0,99	0,94	0,86	0,76	0,70	0,66	0,62	0,63	0,61	0,64	αw: 0,75 (M)
	αp		0,05			0,25		0,75				1,00			0,85			0,65			0,65		SAA: 0,82
h=200mm d=50mm	αs	0,12	0,18	0,27	0,39	0,48	0,65	0,85	1,00	0,94	0,97	0,91	0,90	0,85	0,91	0,83	0,79	0,72	0,67	0,64	0,63	0,65	αw: 0,80 (L)
	αp		0,20			0,50			0,95			0,95			0,85			0,75			0,65		SAA: 0,86
h=200mm d=0mm	αs	0,07	0,11	0,14	0,22	0,22	0,39	0,52	0,60	0,75	0,82	0,74	0,69	0,56	0,47	0,57	0,54	0,52	0,53	0,53	0,52	0,56	αw: 0,60
	αp		0,10			0,30			0,60			0,75			0,55			0,55			0,55		SAA: 0,61
h=200mm d=180mm	αs	0,25	0,57	0,70	0,95	0,89	0,88	0,96	0,96	0,96	0,98	0,93	0,93	0,92	0,87	0,81	0,79	0,72	0,69	0,66	0,65	0,70	αw: 0,75 (L)
	αp		0,50			0,90			0,95			0,95			0,85			0,75			0,65		SAA: 0,87

Datasheet Lochform R16D10

V5_2022_7

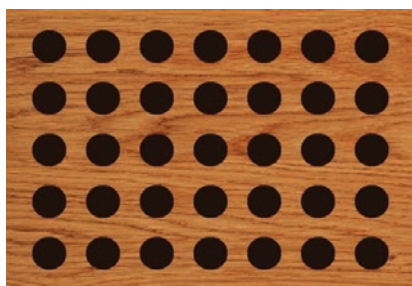

R = Grid in mm: 16,0mm
D = Diameter in mm: 10,0mm

Open surface: 30,68%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Panel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Panel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by TGM

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

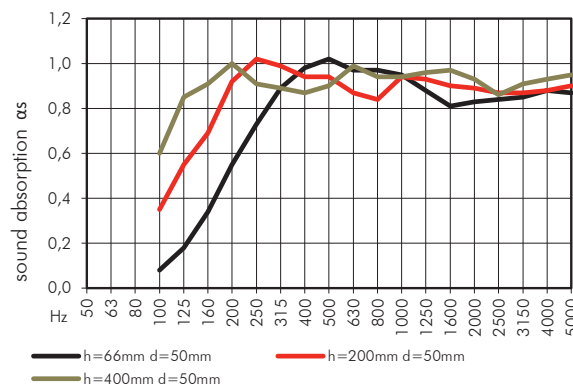

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α _s				0,08	0,18	0,34	0,55	0,73	0,89	0,98	1,02	0,97	0,97	0,95	0,88	0,81	0,83	0,84	0,85	0,88	0,87	α _w : 0,90
	α _p					0,20			0,70			1,00			0,95			0,85			0,85		SAA: 0,87
h=200mm d=50mm	α _s				0,35	0,55	0,69	0,92	1,02	0,99	0,94	0,94	0,87	0,84	0,94	0,93	0,90	0,89	0,87	0,87	0,88	0,90	α _w : 0,90 (L)
	α _p					0,55			1,00			0,90			0,90			0,90			0,90		SAA: 0,92
h=400mm d=50mm	α _s				0,60	0,85	0,91	1,00	0,91	0,89	0,87	0,90	0,99	0,94	0,94	0,96	0,97	0,93	0,86	0,91	0,93	0,95	α _w : 0,95
	α _p					0,80			0,95			0,90			0,95			0,90			0,95		SAA: 0,93

Datasheet Lochform R32D8

VS_2022_7

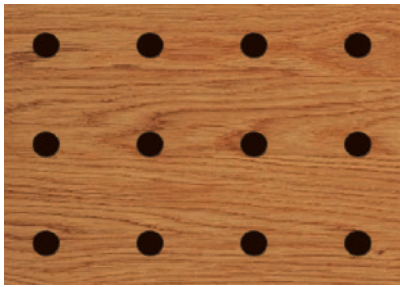

R = Grid in mm: 32,0mm
D = Diameter in mm: 8,0mm

Open surface: 4,91%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Paneel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

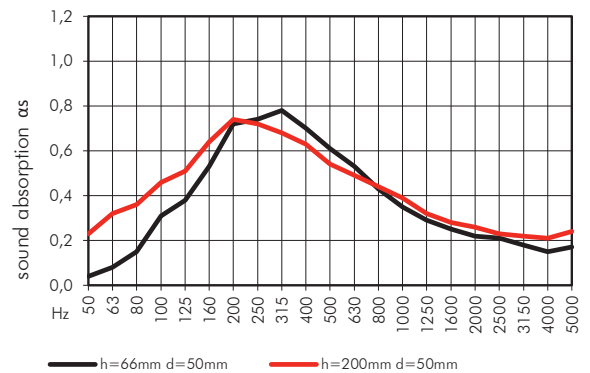

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α _s	0,04	0,08	0,15	0,31	0,38	0,53	0,72	0,74	0,78	0,70	0,61	0,53	0,43	0,35	0,29	0,25	0,22	0,21	0,18	0,15	0,17	α _w : 0,30 (LM)
	α _p		0,10			0,40			0,75						0,35			0,25			0,15		SAA: 0,48
h=200mm d=50mm	α _s	0,23	0,32	0,36	0,46	0,51	0,64	0,74	0,72	0,68	0,63	0,54	0,49	0,44	0,39	0,32	0,28	0,26	0,23	0,22	0,21	0,24	α _w : 0,30 (LM)
	α _p		0,30			0,55			0,70				0,55			0,40			0,25			0,20	SAA: 0,47

Datasheet Lochform R32D12

VS_2022_7

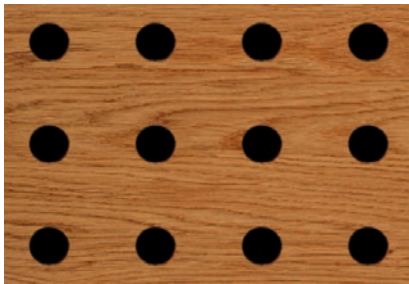

R = Grid in mm: 32,0mm
D = Diameter in mm: 12,0mm

Open surface: 11,04%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Paneel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

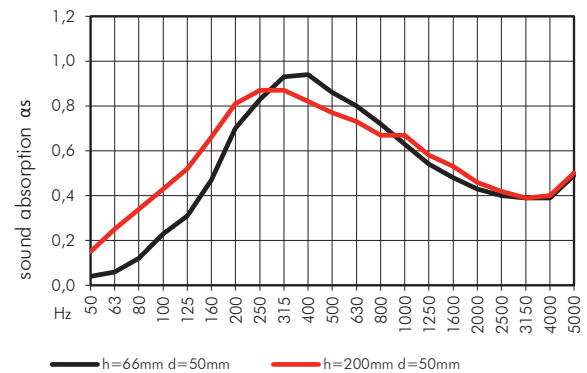

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α _s	0,04	0,06	0,12	0,23	0,31	0,47	0,70	0,83	0,93	0,94	0,86	0,80	0,72	0,63	0,54	0,48	0,43	0,40	0,39	0,39	0,49	α _w : 0,50 (LM)
	α _p		0,05			0,35			0,80			0,85			0,65			0,45			0,40		SAA: 0,69
h=200mm d=50mm	α _s	0,15	0,25	0,34	0,43	0,52	0,66	0,81	0,87	0,87	0,82	0,77	0,73	0,67	0,67	0,58	0,53	0,46	0,42	0,39	0,40	0,50	α _w : 0,55 (L)
	α _p		0,25			0,55			0,85			0,75			0,65			0,45			0,45		SAA: 0,68

Datasheet Lochform R32D16

VS_2022_7

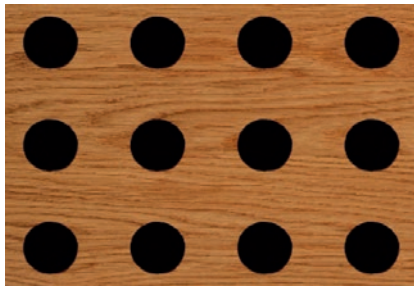

R = Grid in mm: 32,0mm
D = Diameter in mm: 16,0mm

Open surface: 19,63%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Paneel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by TGM


Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

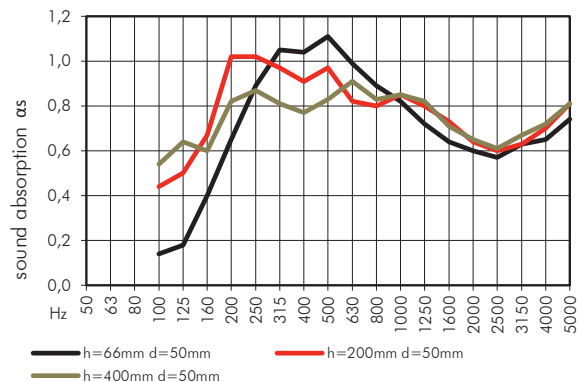

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm	αs				0,14	0,18	0,40	0,65	0,89	1,05	1,04	1,11	0,99	0,89	0,82	0,72	0,64	0,60	0,57	0,63	0,65	0,74	αw: 0,70 (LM)
d=50mm	αp					0,25			0,85			1,05			0,80			0,60			0,65		SAA: 0,83
h=200mm	αs				0,44	0,50	0,67	1,02	1,02	0,97	0,91	0,97	0,82	0,80	0,85	0,80	0,73	0,64	0,60	0,63	0,70	0,81	αw: 0,75 (L)
d=50mm	αp					0,55			1,00			0,90			0,80			0,65			0,70		SAA: 0,84
h=400mm	αs				0,54	0,64	0,60	0,82	0,87	0,81	0,77	0,83	0,91	0,83	0,85	0,82	0,71	0,65	0,61	0,67	0,72	0,81	αw: 0,75 (L)
d=50mm	αp					0,60			0,85			0,85			0,85			0,65			0,75		SAA: 0,79

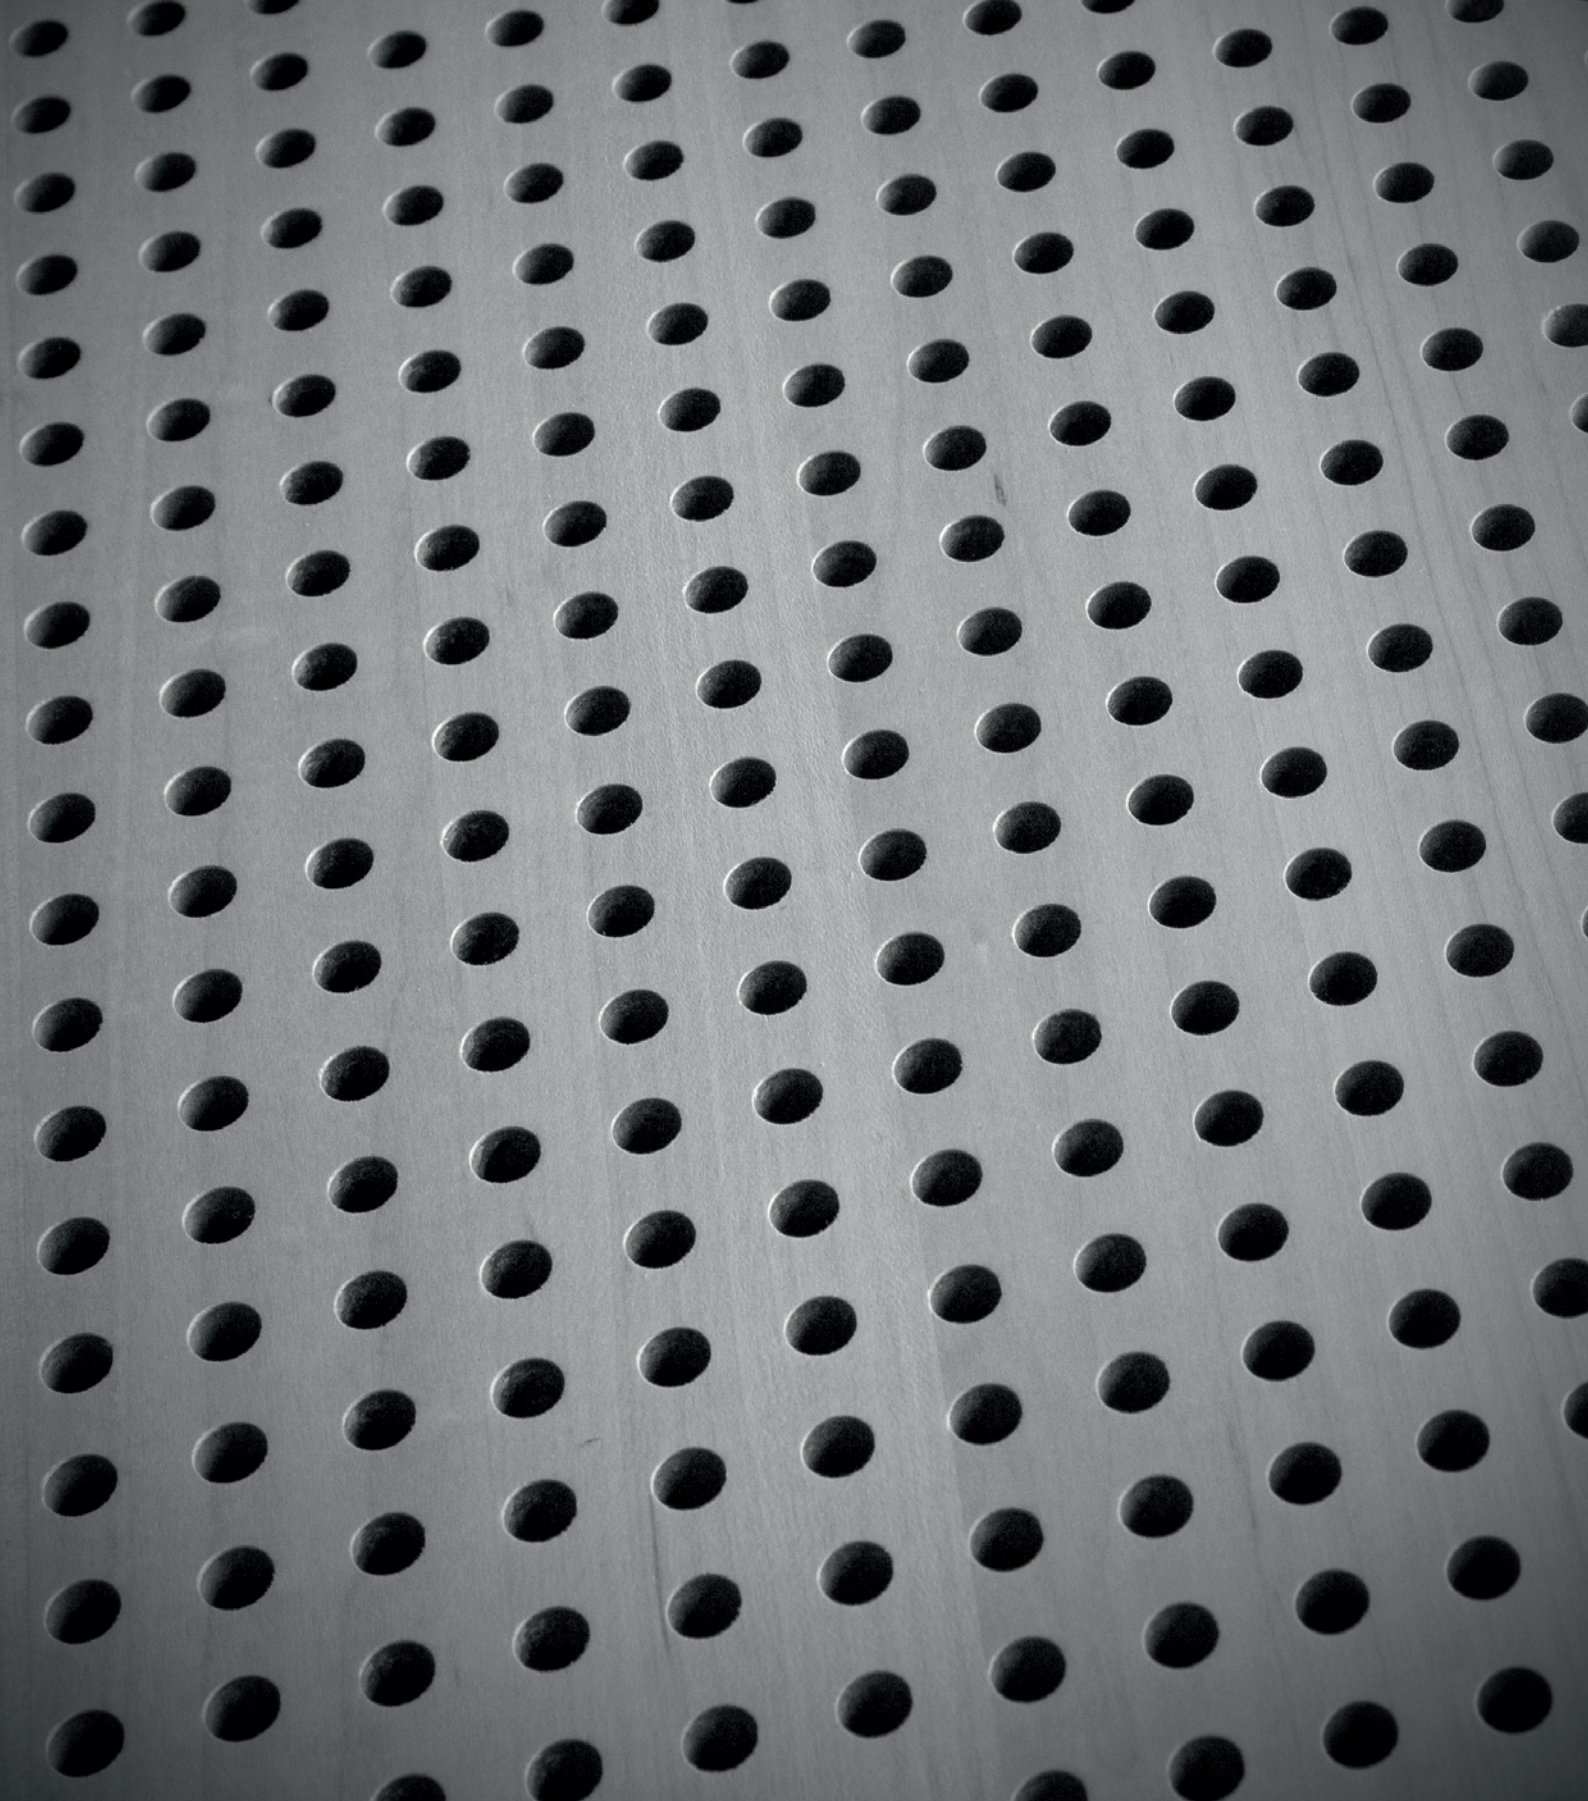

Trikustik GesmbH
Ritterkamp 8
3911 Rappottenstein
office@trikustik.at

www.trikustik.at

