

MIKRO FORM

**Acoustic perforations with
hole diameter 0.5-2 mm**



www.trikustik.at




www.trikustik.at

WE MAKE WOOD SOUND GOOD

TRIKUSTIK is an innovative Austrian company specialising in the development and manufacturing of high-quality acoustic boards made of solid wood and wood-based materials.

Through this focus on products for room acoustic optimisation, we offer building owners, acoustic planners, architects and processors many years of expertise in the development of individual solutions and a high variance of standardised design options.

As a team, we deliberately break new ground and develop ourselves according to the principles of self-organisation.

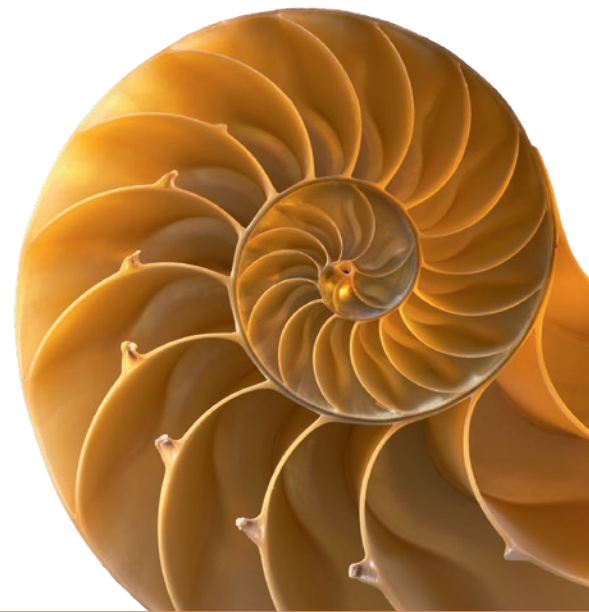


MIKRO FORM

ACOUSTIC BOARDS

Acoustic boards with micro-perforation combine maximum acoustic optimization with minimal change to the appearance and character of the surface.


The options range from broadband absorbers to special low-frequency absorbers. Due to the order-related production, hole-free areas as well as cut-outs can be made according to customer requirements .

More reference photos on
www.trikustik.at

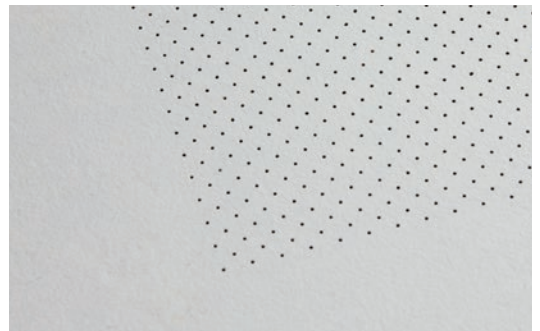

Datasheet Mikroform R6,4D2ST

VS_2023_1

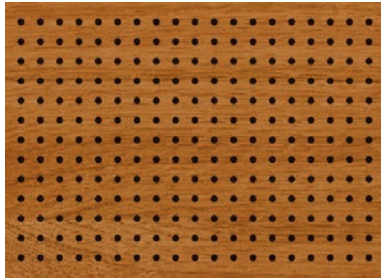

R = Grid in mm: 6,4mm
D = Diameter in mm: 2,0mm

Open surface: 7,67%

Applicable for

- Ceiling
- Wall
- Cabinet door
- Partitioning
- Lay In

PRODUCT OPTIONS

Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation

Back side: drilled

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut

as Format Lamelle → li lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)

Materials: MDF and many other materials

Surfaces: many options depending on material

Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by TU Graz

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

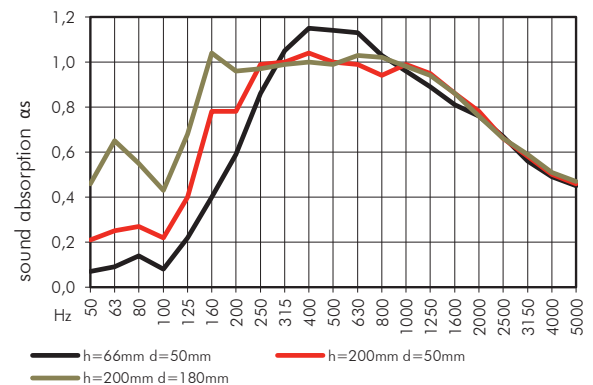

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α _s	0,07	0,09	0,14	0,08	0,22	0,40	0,59	0,86	1,05	1,15	1,14	1,13	1,03	0,96	0,89	0,81	0,76	0,67	0,56	0,49	0,45	α _w : 0,70 (LM)
	α _p		0,10			0,25			0,85			1,15			0,95			0,75			0,50		SAA: 0,73
h=200mm d=50mm	α _s	0,21	0,25	0,27	0,22	0,40	0,78	0,78	0,99	1,00	1,04	1,00	0,99	0,94	0,99	0,95	0,86	0,78	0,66	0,58	0,50	0,46	α _w : 0,70 (LM)
	α _p		0,25			0,45			0,90			1,00			0,95			0,75			0,50		SAA: 0,75
h=200mm d=180mm	α _s	0,46	0,65	0,55	0,43	0,68	1,04	0,96	0,97	0,99	1,00	0,99	1,03	1,02	0,98	0,94	0,86	0,76	0,66	0,59	0,51	0,47	α _w : 0,70 (LM)
	α _p		0,55			0,70			0,95			1,00			1,00			0,75			0,50		SAA: 0,74

Datasheet Mikroform R8D2ST

VS_2022_7

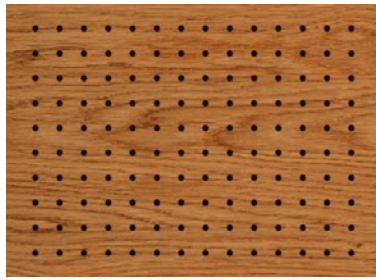

R = Grid in mm: 8,0mm
D = Diameter in mm: 2,0mm

Open surface: 4,91%

Applicable for

- Ceiling
- Wall
- Cabinet door
- Partitioning
- Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation
Back side: drilled

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Panel -> industrial cut
as Format Lamelle → li lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

Formats: Lamelle (fix) + Panel (variable)

Materials: MDF and many other materials

Surfaces: many options depending on material

Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

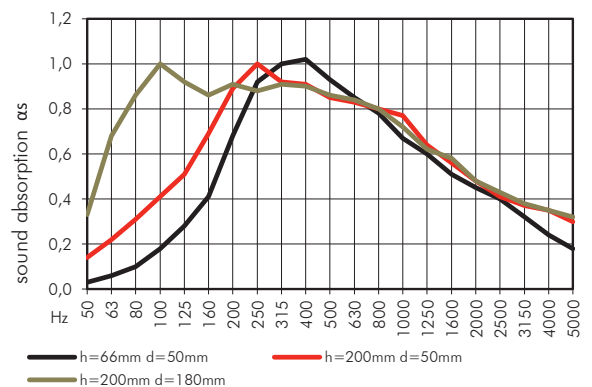

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs	0,03	0,06	0,10	0,18	0,28	0,41	0,68	0,92	1,00	1,02	0,93	0,85	0,78	0,67	0,60	0,51	0,45	0,40	0,32	0,24	0,18	αw: 0,45 (LM)
	αp		0,05			0,30			0,85			0,95			0,70			0,45			0,25		SAA: 0,73
h=200mm d=50mm	αs	0,14	0,22	0,31	0,41	0,51	0,69	0,89	1,00	0,92	0,91	0,85	0,83	0,80	0,77	0,64	0,56	0,48	0,41	0,37	0,35	0,30	αw: 0,50 (LM)
	αp		0,20			0,55			0,95			0,85			0,75			0,50			0,35		SAA: 0,75
h=200mm d=180mm	αs	0,33	0,68	0,86	1,00	0,92	0,86	0,91	0,88	0,91	0,90	0,86	0,84	0,80	0,72	0,62	0,58	0,48	0,43	0,38	0,35	0,32	αw: 0,50 (LM)
	αp		0,60			0,95			0,90			0,85			0,70			0,50			0,35		SAA: 0,74

Datasheet Mikroform R3D1.2ST (HS1)

VS_2023_1
replaces R2,9D1,2ST (HS1)

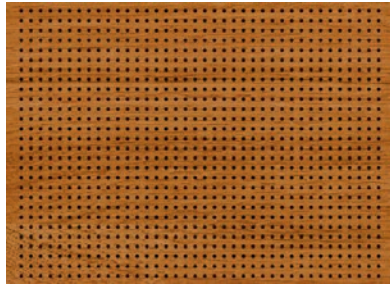

R = Grid in mm: 3,0mm
D = Diameter in mm: 1,2mm

Open surface: 11,04%

Applicable for

- Ceiling
- Wall
- Cabinet door
- Partitioning
- Lay In

PRODUCT OPTIONS

Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation
Back side: drilled

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle -> li lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)
Materials: MDF and chip board
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

- available formats and measures
- available materials
- available surfaces and colors
- options regarding fire protection





All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES


Measurement: acc. to DIN EN ISO 354
Data source: certificate by TU Graz
Valid for: application at wall and ceiling
Fleece: SP50 or equivalent
Insulation: Sonorock or equivalent

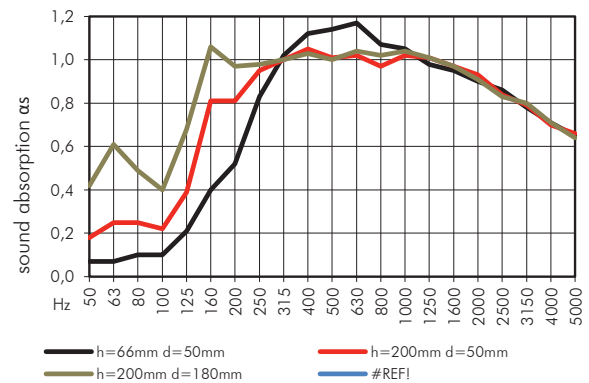

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α _s	0,07	0,07	0,10	0,10	0,21	0,40	0,52	0,83	1,02	1,12	1,14	1,17	1,07	1,05	0,98	0,95	0,90	0,86	0,78	0,71	0,65	α _w : 0,90
	α _p		0,10			0,25			0,80			1,15			1,05			0,90			0,70		SAA: 0,90
h=200mm d=50mm	α _s	0,18	0,25	0,25	0,22	0,39	0,81	0,81	0,95	1,00	1,05	1,01	1,02	0,97	1,02	1,01	0,97	0,93	0,84	0,79	0,70	0,66	α _w : 0,90
	α _p		0,25			0,45			0,90			1,05			1,00			0,90			0,70		SAA: 0,89
h=200mm d=180mm	α _s	0,42	0,61	0,49	0,40	0,68	1,06	0,97	0,98	1,00	1,03	1,00	1,04	1,02	1,04	1,01	0,97	0,91	0,83	0,80	0,71	0,64	α _w : 0,90 (L)
	α _p		0,50			0,70			1,00			1,00			1,00			0,90			0,70		SAA: 0,92

Datasheet Mikroform R4D1.2ST (H1)

VS_2022_7

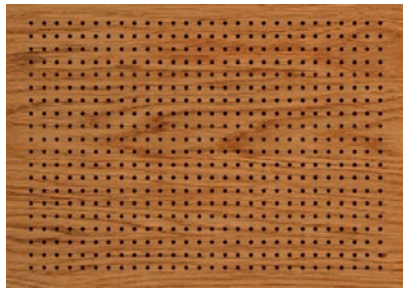

R = Grid in mm: 4,0mm
D = Diameter in mm: 1,2mm

Open surface: 7,07%

Applicable for

- Ceiling
- Wall
- Cabinet door
- Partitioning
- Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation
Back side: drilled

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle -> lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

- available formats and measures
- available materials
- available surfaces and colors
- options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

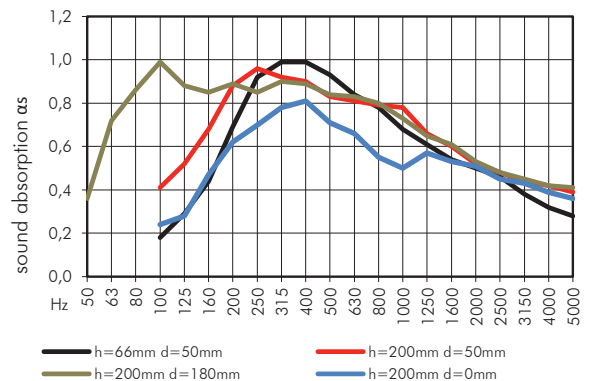

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs				0,18	0,29	0,44	0,69	0,92	0,99	0,99	0,93	0,84	0,78	0,68	0,61	0,54	0,50	0,46	0,38	0,32	0,28	αw: 0,50 (LM)
	αp					0,30			0,85			0,90			0,70			0,50			0,35		SAA: 0,74
h=200mm d=50mm	αs				0,41	0,52	0,68	0,88	0,96	0,92	0,90	0,83	0,81	0,79	0,78	0,66	0,60	0,52	0,48	0,44	0,42	0,39	αw: 0,55 (LM)
	αp					0,55			0,90			0,85			0,75			0,55			0,40		SAA: 0,76
h=200mm d=180mm	αs	0,36	0,72	0,86	0,99	0,88	0,85	0,89	0,85	0,90	0,89	0,84	0,83	0,80	0,73	0,65	0,61	0,53	0,48	0,45	0,42	0,41	αw: 0,60 (LM)
	αp					0,90			0,90			0,85			0,75			0,55			0,45		SAA: 0,75
h=200mm d=0mm	αs				0,24	0,28	0,47	0,62	0,70	0,78	0,81	0,71	0,66	0,55	0,50	0,57	0,53	0,51	0,45	0,43	0,39	0,36	αw: 0,55 (LM)
	αp					0,35			0,70			0,75			0,55			0,50			0,40		SAA: 0,62

Datasheet Mikroform R8D1.2ST (M1)

V5_2022_7

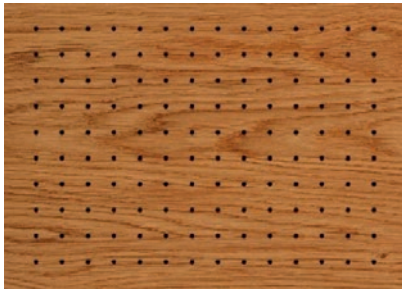

R = Grid in mm: 8,0mm
D = Diameter in mm: 1,2mm

Open surface: 1,77%

Applicable for

- Ceiling
- Wall
- Cabinet door
- Partitioning
- Lay In

PRODUCT OPTIONS

Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation
Back side: drilled

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle -> li lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)

Materials: MDF and many other materials

Surfaces: many options depending on material

Fire Protection: many options depending on material

ONLINE - Product Range Overview

- available formats and measures
- available materials
- available surfaces and colors
- options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent


Insulation: Sonorock or equivalent

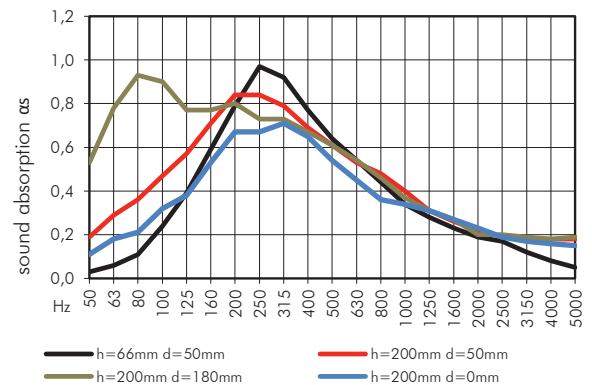

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs	0,03	0,06	0,11	0,24	0,39	0,59	0,79	0,97	0,92	0,77	0,64	0,54	0,44	0,34	0,28	0,23	0,19	0,17	0,12	0,08	0,05	αw: 0,25 (LM)
	αp		0,05			0,40			0,90			0,65			0,35			0,20			0,10		SAA: 0,52
h=200mm d=50mm	αs	0,19	0,29	0,36	0,47	0,57	0,71	0,84	0,84	0,79	0,69	0,61	0,53	0,48	0,40	0,31	0,26	0,22	0,19	0,18	0,18	0,18	αw: 0,30 (LM)
	αp		0,30			0,60			0,80			0,60			0,40			0,20			0,20		SAA: 0,51
h=200mm d=180mm	αs	0,53	0,78	0,93	0,90	0,77	0,77	0,80	0,73	0,73	0,67	0,61	0,54	0,46	0,37	0,31	0,27	0,20	0,20	0,19	0,18	0,19	αw: 0,30 (LM)
	αp		0,75			0,80			0,75			0,60			0,40			0,20			0,20		SAA: 0,49
h=200mm d=0mm	αs	0,11	0,18	0,21	0,32	0,38	0,53	0,67	0,67	0,71	0,65	0,54	0,45	0,36	0,34	0,31	0,27	0,23	0,19	0,17	0,16	0,15	αw: 0,30 (LM)
	αp		0,15			0,40			0,70			0,55			0,35			0,25			0,15		SAA: 0,45

Datasheet Mikroform R16D1.2ST (L1)

VS_2022_7

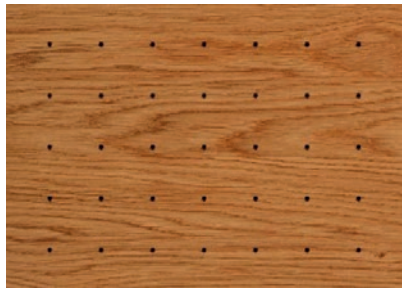

R = Grid in mm: 16,0mm
D = Diameter in mm: 1,2mm

Open surface: 0,44%

Applicable for

- Ceiling
- Wall
- Cabinet door
- Partitioning
- Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation
Back side: drilled

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle -> lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)
Materials: MDF and many other materials
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

- available formats and measures
- available materials
- available surfaces and colors
- options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

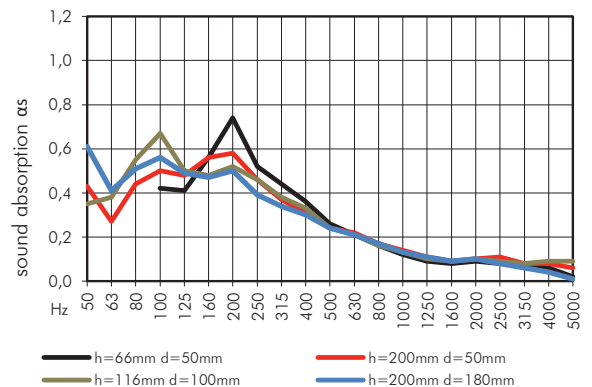

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α _s				0,42	0,41	0,56	0,74	0,52	0,44	0,36	0,26	0,21	0,16	0,12	0,09	0,08	0,09	0,08	0,07	0,06	0,02	α _w : 0,15 (L)
	α _p					0,45			0,55			0,30			0,10			0,10			0,05		SAA: 0,26
h=200mm d=50mm	α _s	0,43	0,27	0,44	0,50	0,48	0,56	0,58	0,46	0,37	0,31	0,24	0,22	0,17	0,14	0,11	0,09	0,10	0,11	0,08	0,08	0,06	α _w : 0,15 (L)
	α _p		0,40			0,50			0,45			0,25			0,15			0,10			0,05		SAA: 0,24
h=116mm d=100mm	α _s	0,35	0,38	0,55	0,67	0,50	0,48	0,52	0,46	0,38	0,33	0,24	0,21	0,16	0,13	0,10	0,09	0,10	0,09	0,08	0,09	0,09	α _w : 0,15 (L)
	α _p		0,45			0,55			0,45			0,25			0,15			0,10			0,10		SAA: 0,23
h=200mm d=180mm	α _s	0,61	0,41	0,51	0,56	0,49	0,47	0,50	0,39	0,34	0,30	0,24	0,21	0,17	0,13	0,11	0,09	0,10	0,08	0,06	0,04	0,01	α _w : 0,15 (L)
	α _p		0,50			0,50			0,40			0,25			0,15			0,10			0,05		SAA: 0,22

Datasheet Mikroform R2D0,5_V30

V5_2022_7



R = Grid in mm: 2,0mm
D = Diameter in mm: 0,5mm

Open surface: 4,91%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS

Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation
Back side: grooved

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle → li lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)

Materials: MDF

Surfaces: many options depending on material

Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

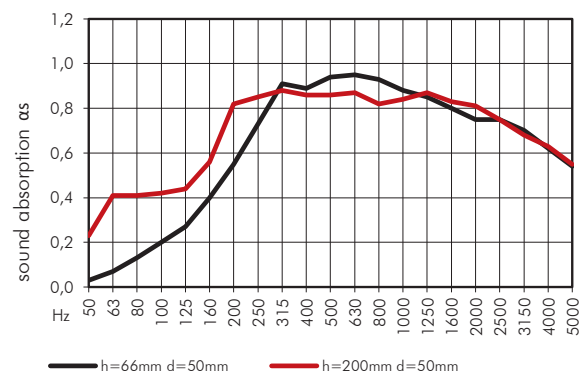

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs	0,03	0,07	0,13	0,20	0,27	0,40	0,55	0,73	0,91	0,89	0,94	0,95	0,93	0,88	0,85	0,80	0,75	0,75	0,70	0,62	0,54	αw: 0,75
	αp		0,10			0,30			0,75			0,95			0,90			0,75			0,60		SAA: 0,83
h=200mm d=50mm	αs	0,23	0,41	0,41	0,42	0,44	0,56	0,82	0,85	0,88	0,86	0,86	0,87	0,82	0,84	0,87	0,83	0,81	0,75	0,68	0,63	0,55	αw: 0,80 (L)
	αp		0,35			0,45			0,85			0,85			0,85			0,80			0,60		SAA: 0,84

Datasheet Mikroform R4D0,5_V45

VS_2022_7



R = Grid in mm: 4,0mm
D = Diameter in mm: 0,5mm

Open surface: 2,45%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation
Back side: grooved

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle → li lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)
Materials: MDF
Surfaces: many options depending on material
Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures
→ available materials
→ available surfaces and colors
→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

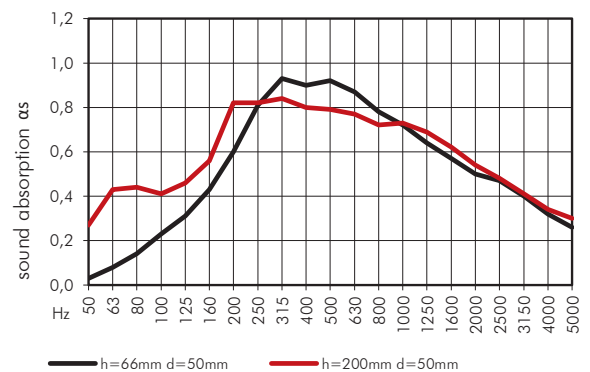

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs	0,03	0,08	0,14	0,23	0,31	0,43	0,60	0,81	0,93	0,90	0,92	0,87	0,78	0,72	0,64	0,57	0,50	0,47	0,40	0,32	0,26	αw: 0,50(LM)
	αp		0,10			0,30			0,80			0,90			0,70			0,50			0,35		SAA: 0,73
h=200mm d=50mm	αs	0,27	0,43	0,44	0,41	0,46	0,56	0,82	0,82	0,84	0,80	0,79	0,77	0,72	0,73	0,69	0,62	0,54	0,48	0,41	0,34	0,30	αw: 0,55(LM)
	αp		0,40			0,50			0,85			0,80			0,70			0,55			0,35		SAA: 0,72


Datasheet Mikroform for Cabinet doors

V5_2023_1


R = Grid in mm:

D = Diameter in mm:


R8D2ST




R8D1,2ST




R3D1,2ST (formerly R2,9D1,2ST)




R6,4D2ST



R4D1,2ST



R2D0,5 V30



Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: Zertifikat LGA/TÜV // TU Graz

Valid for: cabinet doors

Fleece: SP50 or equivalent

Insulation: 80% filled with books and files

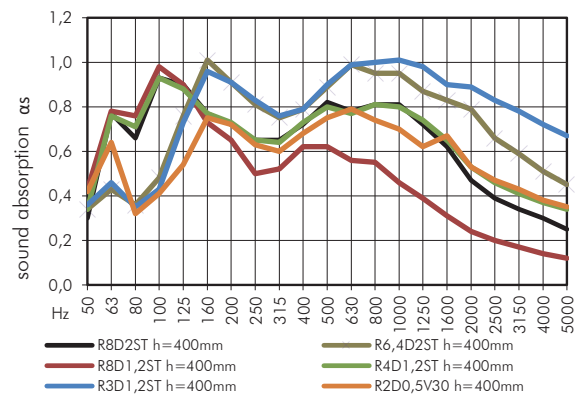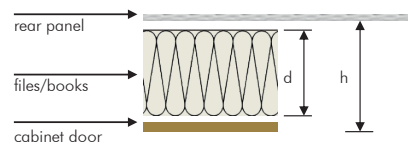

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
R8D2ST h=400mm	α_s	0,30	0,77	0,66	0,93	0,90	0,77	0,72	0,65	0,65	0,72	0,82	0,78	0,81	0,81	0,72	0,62	0,47	0,39	0,34	0,30	0,25	α_w : 0,50 (LM)
	α_p		0,60			0,85			0,65			0,75			0,80			0,50			0,30		SAA: 0,68
R6,4D2ST h=400mm	α_s	0,34	0,43	0,36	0,48	0,76	1,01	0,91	0,81	0,75	0,79	0,89	0,99	0,95	0,95	0,87	0,83	0,79	0,66	0,59	0,51	0,45	α_w : 0,70 (L)
	α_p		0,40			0,75			0,80			0,90			0,90			0,75			0,50		SAA: 0,85
R8D1,2ST h=400mm	α_s	0,43	0,78	0,76	0,98	0,90	0,73	0,65	0,50	0,52	0,62	0,62	0,56	0,55	0,46	0,39	0,31	0,24	0,20	0,17	0,14	0,12	α_w : 0,30 (LM)
	α_p		0,65			0,85			0,55			0,60			0,45			0,25			0,15		SAA: 0,47
R4D1,2ST h=400mm	α_s	0,34	0,76	0,71	0,93	0,88	0,77	0,73	0,65	0,64	0,73	0,80	0,77	0,81	0,80	0,74	0,65	0,53	0,46	0,41	0,37	0,34	α_w : 0,55 (LM)
	α_p		0,60			0,85			0,65			0,75			0,80			0,55			0,35		SAA: 0,69
R3D1,2ST h=400mm	α_s	0,36	0,46	0,35	0,43	0,73	0,96	0,91	0,83	0,76	0,79	0,90	0,99	1,00	1,01	0,98	0,90	0,89	0,83	0,78	0,72	0,67	α_w : 0,85
	α_p		0,40			0,70			0,85			0,90			1,00			0,85			0,70		SAA: 0,90
R2D0,5V30 h=400mm	α_s	0,42	0,64	0,32	0,41	0,54	0,75	0,72	0,63	0,60	0,68	0,75	0,79	0,74	0,70	0,62	0,67	0,53	0,47	0,43	0,38	0,35	α_w : 0,55 (L)
	α_p		0,45			0,55			0,65			0,75			0,70			0,55			0,40		SAA: 0,66

REFERENCES

Lecture halls, auditoriums and universities

Österreichisches Parlament / BOKU Wien / JKU Linz /
IST Austria / Uni Wien / FH Hagenberg /...

Schools and kindergartens

Bildungszentrum Reith / Tourismusschule St. Johann / KIGA Bad
Sauerbrunn / VS Brunn /...

Concert and lecture halls

Stadthalle Wien / Landestheater Linz / Festspiele Bregenz /...

Music rehearsal rooms

Future Art Lab / Synchron Stage Vienna / Wiener Sängerknaben
/ Hofburg / Tonstudio ORF /...

Sports halls, gymnasiums and exercise rooms

Multiversum Schwechat / Sportpark Lissfeld /
Turnsaal Michelhausen /...

Office and meeting areas

Europäisches Parlament_Strassburg / mysugr / KPMG / Engel
GmbH / Erber Group /...

Gastronomy and commerce

The Eagle_Kreischberg / SCS / Kurhotel Bad Zell / Weingut
Högl /...



Trikustik GesmbH
Ritterkamp 8
3911 Rappottenstein
office@trikustik.at

www.trikustik.at

