


Datasheet Lochform R32D8

VS_2022_7

R = Grid in mm: 32,0mm
 D = Diameter in mm: 8,0mm

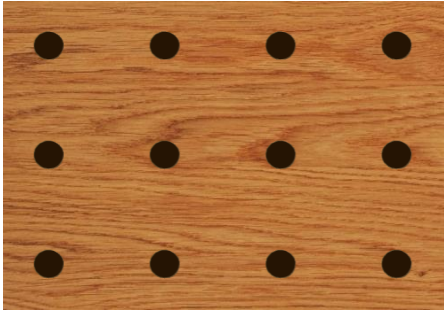

Open surface: 4,91%

- Applicable for
- Ceiling
 - Wall
 - Cabinet door
 - Partitioning
 - Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut

Options: unperforated friezes according to customer requirements

Formats: Paneel (variable)

Materials: MDF and many other materials

Surfaces: many options depending on material

Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date

via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

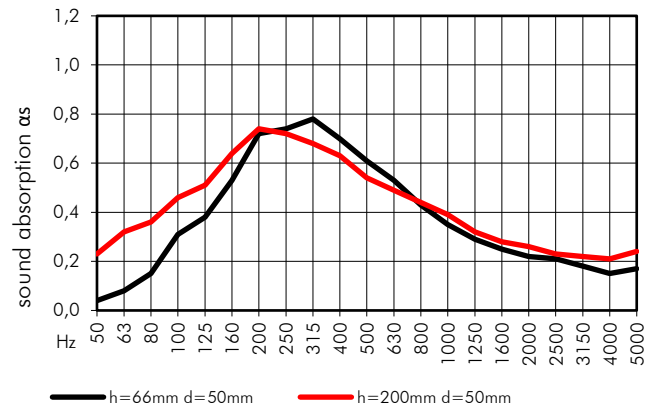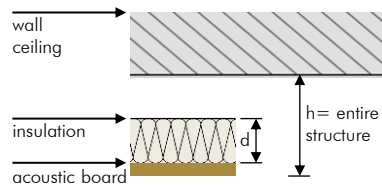

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α_s	0,04	0,08	0,15	0,31	0,38	0,53	0,72	0,74	0,78	0,70	0,61	0,53	0,43	0,35	0,29	0,25	0,22	0,21	0,18	0,15	0,17	α_w : 0,30 (LM)
	α_p		0,10			0,40			0,75			0,60			0,35			0,25			0,15		SAA: 0,48
h=200mm d=50mm	α_s	0,23	0,32	0,36	0,46	0,51	0,64	0,74	0,72	0,68	0,63	0,54	0,49	0,44	0,39	0,32	0,28	0,26	0,23	0,22	0,21	0,24	α_w : 0,30 (LM)
	α_p		0,30				0,55			0,70					0,40			0,25			0,20		SAA: 0,47