


Datasheet Lochform R8D4

VS_2022_7

R = Grid in mm: 8,0mm
 D = Diameter in mm: 4,0mm

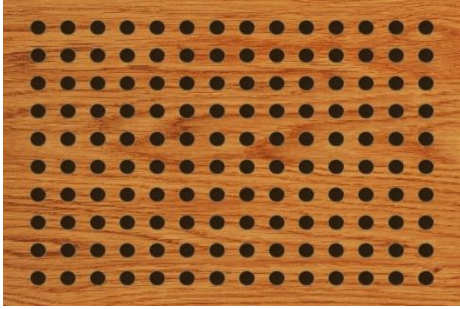

Open surface: 19,63%

- Applicable for
- Ceiling
 - Wall
 - Cabinet door
 - Partitioning
 - Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut

Options: unperforated friezes according to customer requirements

- Formats:** Panel (variable)
- Materials:** MDF and many other materials
- Surfaces:** many options depending on material
- Fire Protection:** many options depending on material

ONLINE - Product Range Overview

- available formats and measures
- available materials
- available surfaces and colors
- options regarding fire protection



All product options always up to date via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

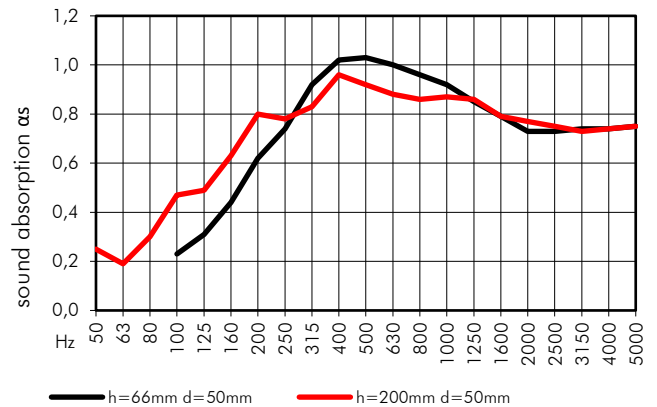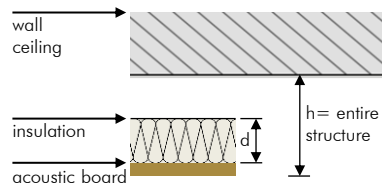

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α _s				0,23	0,31	0,44	0,62	0,74	0,92	1,02	1,03	1,00	0,96	0,92	0,85	0,79	0,73	0,73	0,74	0,74	0,75	α _w : 0,85
	α _p					0,35			0,75			1,00			0,90			0,75			0,75		SAA: 0,86
h=200mm d=50mm	α _s	0,25	0,19	0,30	0,47	0,49	0,63	0,80	0,78	0,83	0,96	0,92	0,88	0,86	0,87	0,86	0,79	0,77	0,75	0,73	0,74	0,75	α _w : 0,85
	α _p		0,25			0,55			0,80			0,90			0,85			0,75			0,75		SAA: 0,84