


Datasheet Mikroform R2D0,5_V30

VS_2022_7

R = Grid in mm: 2,0mm
D = Diameter in mm: 0,5mm

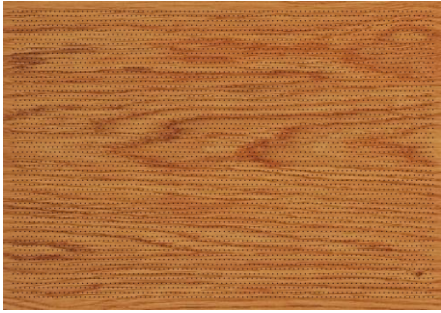

Open surface: 4,91%

- Applicable for
- Ceiling
 - Wall
 - Cabinet door
 - Partitioning
 - Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation
Back side: grooved

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle -> l lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)

Materials: MDF

Surfaces: many options depending on material

Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

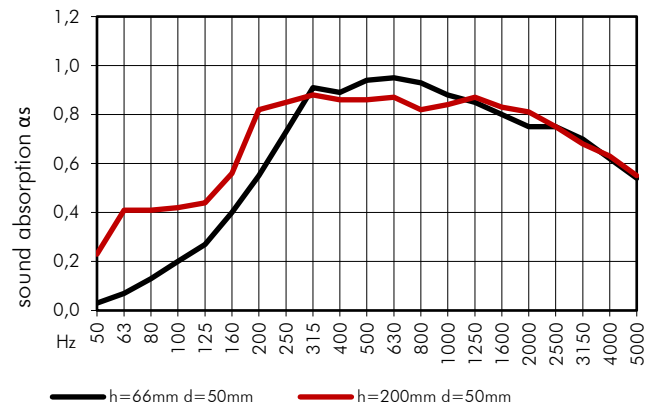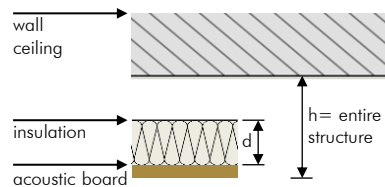

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α_s	0,03	0,07	0,13	0,20	0,27	0,40	0,55	0,73	0,91	0,89	0,94	0,95	0,93	0,88	0,85	0,80	0,75	0,75	0,70	0,62	0,54	α_w : 0,75
	α_p		0,10			0,30			0,75			0,95			0,90			0,75			0,60		SAA: 0,83
h=200mm d=50mm	α_s	0,23	0,41	0,41	0,42	0,44	0,56	0,82	0,85	0,88	0,86	0,86	0,87	0,82	0,84	0,87	0,83	0,81	0,75	0,68	0,63	0,55	α_w : 0,80 (L)
	α_p		0,35			0,45			0,85			0,85			0,85			0,80			0,60		SAA: 0,84