


Datasheet Mikroform R6,4D2ST

VS_2023_1

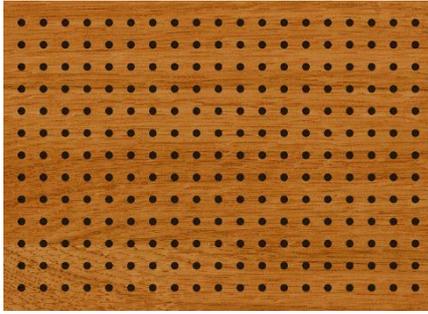

R = Grid in mm: 6,4mm
D = Diameter in mm: 2,0mm

Open surface: 7,67%

- Applicable for
- Ceiling
 - Wall
 - Cabinet door
 - Partitioning
 - Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : Mikroperforation
Back side: drilled

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle → li lengthwise with tongue+groove connection

Options: unperforated friezes according to customer requirements

- Formats:** Lamelle (fix) + Paneel (variable)
- Materials:** MDF and many other materials
- Surfaces:** many options depending on material
- Fire Protection:** many options depending on material

ONLINE - Product Range Overview

- available formats and measures
- available materials
- available surfaces and colors
- options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by TU Graz

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

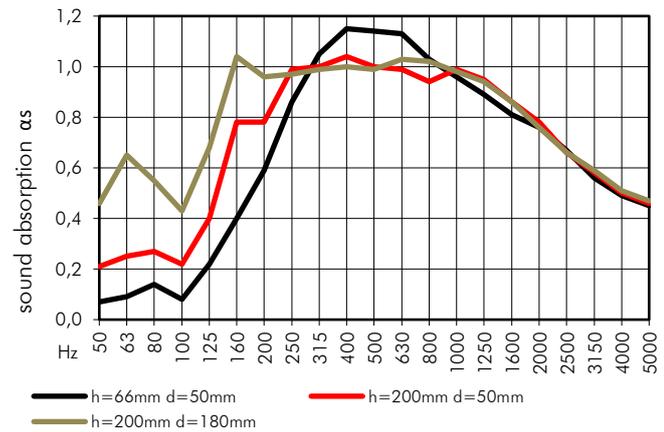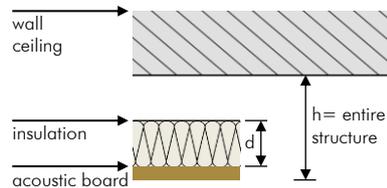

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α_s	0,07	0,09	0,14	0,08	0,22	0,40	0,59	0,86	1,05	1,15	1,14	1,13	1,03	0,96	0,89	0,81	0,76	0,67	0,56	0,49	0,45	α_w : 0,70 (LM)
	α_p		0,10			0,25			0,85			1,00			0,95			0,75			0,50		SAA: 0,73
h=200mm d=50mm	α_s	0,21	0,25	0,27	0,22	0,40	0,78	0,78	0,99	1,00	1,04	1,00	0,99	0,94	0,99	0,95	0,86	0,78	0,66	0,58	0,50	0,46	α_w : 0,70 (LM)
	α_p		0,25			0,45			0,90			1,00			0,95			0,75			0,50		SAA: 0,75
h=200mm d=180mm	α_s	0,46	0,65	0,55	0,43	0,68	1,04	0,96	0,97	0,99	1,00	0,99	1,03	1,02	0,98	0,94	0,86	0,76	0,66	0,59	0,51	0,47	α_w : 0,70 (LM)
	α_p		0,55			0,70			0,95			1,00			1,00			0,75			0,50		SAA: 0,74