

Datasheet Nutform S14N2

VS_2022_7

S14N2-S



S14N2-B



S = Ridge width: 14,0mm
N = Groove width: 2,0mm

Open surface: 6,25%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : grooved
Back side: drilled (-B) or slotted holes (-S)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle -> lengthwise with tongue+groove connection

Options: Milling according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)

Materials: MDF and many other materials

Surfaces: many options depending on material

Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date

via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by LGA/TÜV

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

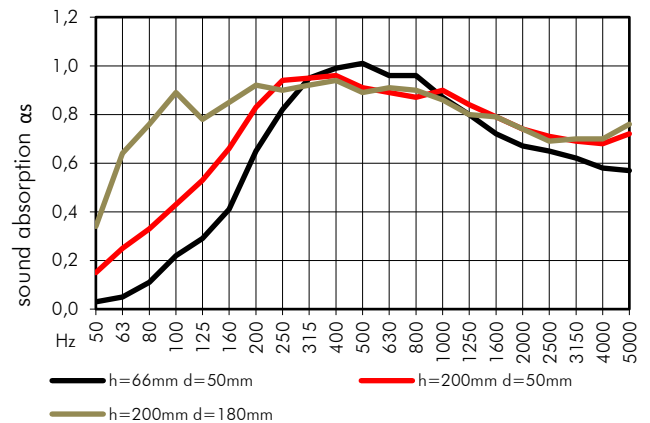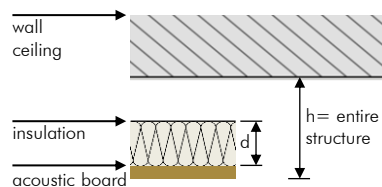

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	α_s	0,03	0,05	0,11	0,22	0,29	0,41	0,65	0,82	0,95	0,99	1,01	0,96	0,96	0,87	0,80	0,72	0,67	0,65	0,62	0,58	0,57	α_w : 0,75(LM)
	α_p		0,05			0,30			0,80			1,00			0,90			0,70			0,60		SAA: 0,85
h=200mm d=50mm	α_s	0,15	0,25	0,33	0,43	0,53	0,66	0,83	0,94	0,95	0,96	0,91	0,89	0,87	0,90	0,84	0,79	0,74	0,71	0,69	0,68	0,72	α_w : 0,80(L)
	α_p		0,25			0,55			0,90			0,90			0,85			0,75			0,70		SAA: 0,85
h=200mm d=180mm	α_s	0,34	0,64	0,76	0,89	0,78	0,85	0,92	0,90	0,92	0,94	0,89	0,91	0,90	0,86	0,80	0,79	0,74	0,69	0,70	0,70	0,76	α_w : 0,80(L)
	α_p		0,60			0,85			0,90			0,90			0,85			0,75			0,70		SAA: 0,86