


Data sheet Nutform S15N6

VS_2025_1

S15N6-B

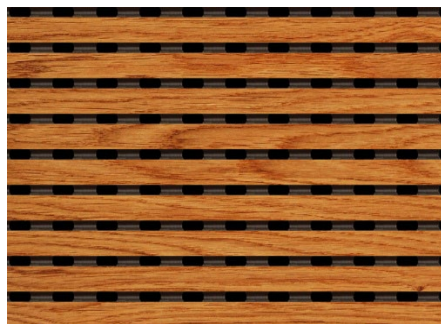

S = Ridge width: 15,0mm
N = Groove width: 6,0mm

Open surface: 17,86%

Applicable for
→ Ceiling
→ Wall
→ Cabinet door
→ Partitioning
→ Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : grooved
Back side: drilled (-B)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Paneel -> industrial cut
as Format Lamelle → lengthwise with tongue+groove connection

Options: Milling according to customer requirements

Formats: Lamelle (fix) + Paneel (variable)

Materials: MDF and many other materials

Surfaces: many options depending on material

Fire Protection: many options depending on material

ONLINE - Product Range Overview

→ available formats and measures

→ available materials

→ available surfaces and colors

→ options regarding fire protection



All product options always up to date
via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by TU Graz

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

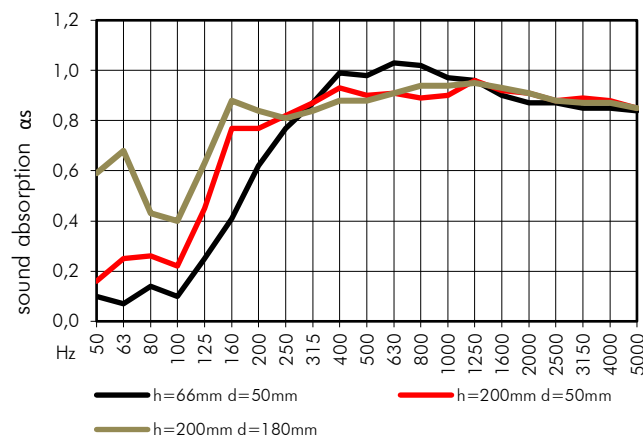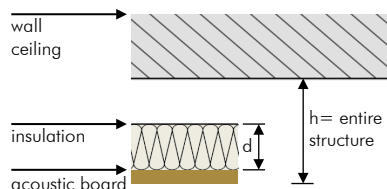

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=66mm d=50mm	αs	0,10	0,07	0,14	0,10	0,25	0,41	0,62	0,77	0,87	0,99	0,98	1,03	1,02	0,97	0,96	0,90	0,87	0,87	0,85	0,85	0,84	αw: 0,95
	αp		0,10			0,25			0,75			1,00			1,00			0,90			0,85		SAA: 0,90
h=200mm d=50mm	αs	0,16	0,25	0,26	0,22	0,45	0,77	0,77	0,82	0,87	0,93	0,90	0,91	0,89	0,90	0,96	0,92	0,91	0,88	0,89	0,88	0,85	αw: 0,90
	αp		0,20			0,50			0,80			0,90			0,90			0,90			0,85		SAA: 0,89
h=200mm d=180mm	αs	0,59	0,68	0,43	0,40	0,63	0,88	0,84	0,81	0,84	0,88	0,88	0,91	0,94	0,94	0,95	0,93	0,91	0,88	0,87	0,87	0,85	αw: 0,95
	αp		0,55			0,65			0,85			0,90			0,95			0,90			0,85		SAA: 0,89