


Datasheet Nutform for Cabinet doors

VS_2022_7

S14N2-B

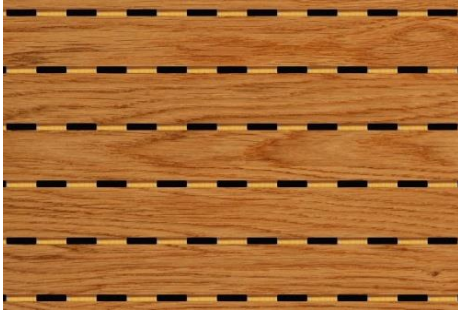

R = Grid in mm: 14,0mm
 D = Diameter in mm: 2,0mm

Open surface: 6,25%

Applicable for
 → Cabinet door

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side : grooved
 Back side: drilled (-B) or slotted holes (-S)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Options: Milling according to customer requirements

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: Zertifikat LGA/TÜV

Valid for: cabinet doors

Fleece: SP50 or equivalent

Insulation: 80% filled with books and files

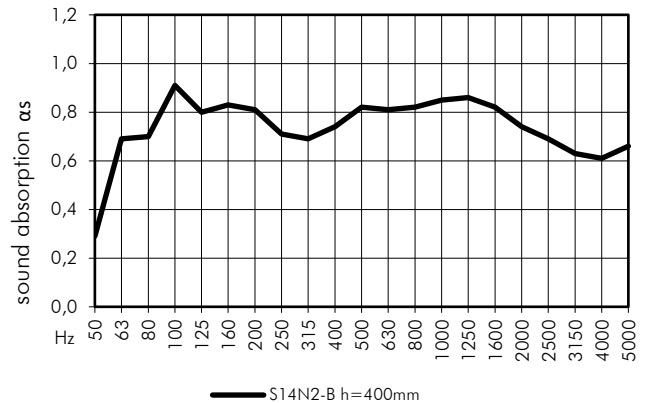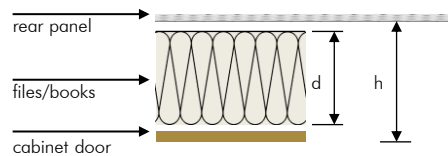

construction	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
S14N2-B h=400mm	αs	0,29	0,69	0,70	0,91	0,80	0,83	0,81	0,71	0,69	0,74	0,82	0,81	0,82	0,85	0,86	0,82	0,74	0,69	0,63	0,61	0,66	αw: 0,80
	αp		0,55			0,85			0,75			0,80			0,85			0,75			0,65		SAA: 0,78